


## Double Face Laminate Saw Blades Grind ATB 35° neg.

Type **17**

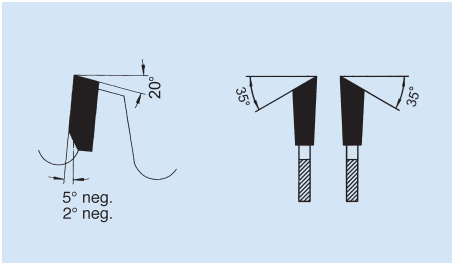

| Item No.       | D<br>(Dia) | B<br>(Kerf) | b<br>(Plate) | d<br>(Bore) | Z<br>(Teeth) | Z<br>(Hook) |
|----------------|------------|-------------|--------------|-------------|--------------|-------------|
| 17-010 001 080 | 10"        | .126"       | .087"        | 5/8"        | 80           | 5° neg.     |
| 17-012 002 096 | 12"        | .126"       | .087"        | 1"          | 96           | 5° neg.     |
| 17-014 002 100 | 14"        | .148"       | .118"        | 1"          | 100          | 2° neg.     |
| 17-220 030 064 | 220mm      | 3.2mm       | 2.2mm        | 30mm        | 64 (**)      | 5° neg.     |
| 17-250 030 080 | 250mm      | 3.2mm       | 2.2mm        | 30mm        | 80 (*)       | 5° neg.     |
| 17-303 030 096 | 303mm      | 3.2mm       | 2.2mm        | 30mm        | 96 (*)       | 5° neg.     |

(\*) 2 combi pin holes

(\*\*) 2 pin holes 7/42mm

For fine cuts in laminated board materials on both sides with melamine, formica, veneer, etc. On table saws without scoring unit, vertical panel sizing saws, radial arm saws, mitre-and chop saws. Extra hard sub-micro grain carbide tips for long edge life.

